




HP PSC 2355 Scanner Glass Replacement

This guide demonstrates how to replace the scanner glass. This is the glass surface in which a document is placed on to be scanned.

Written By: Amber Gabaldon

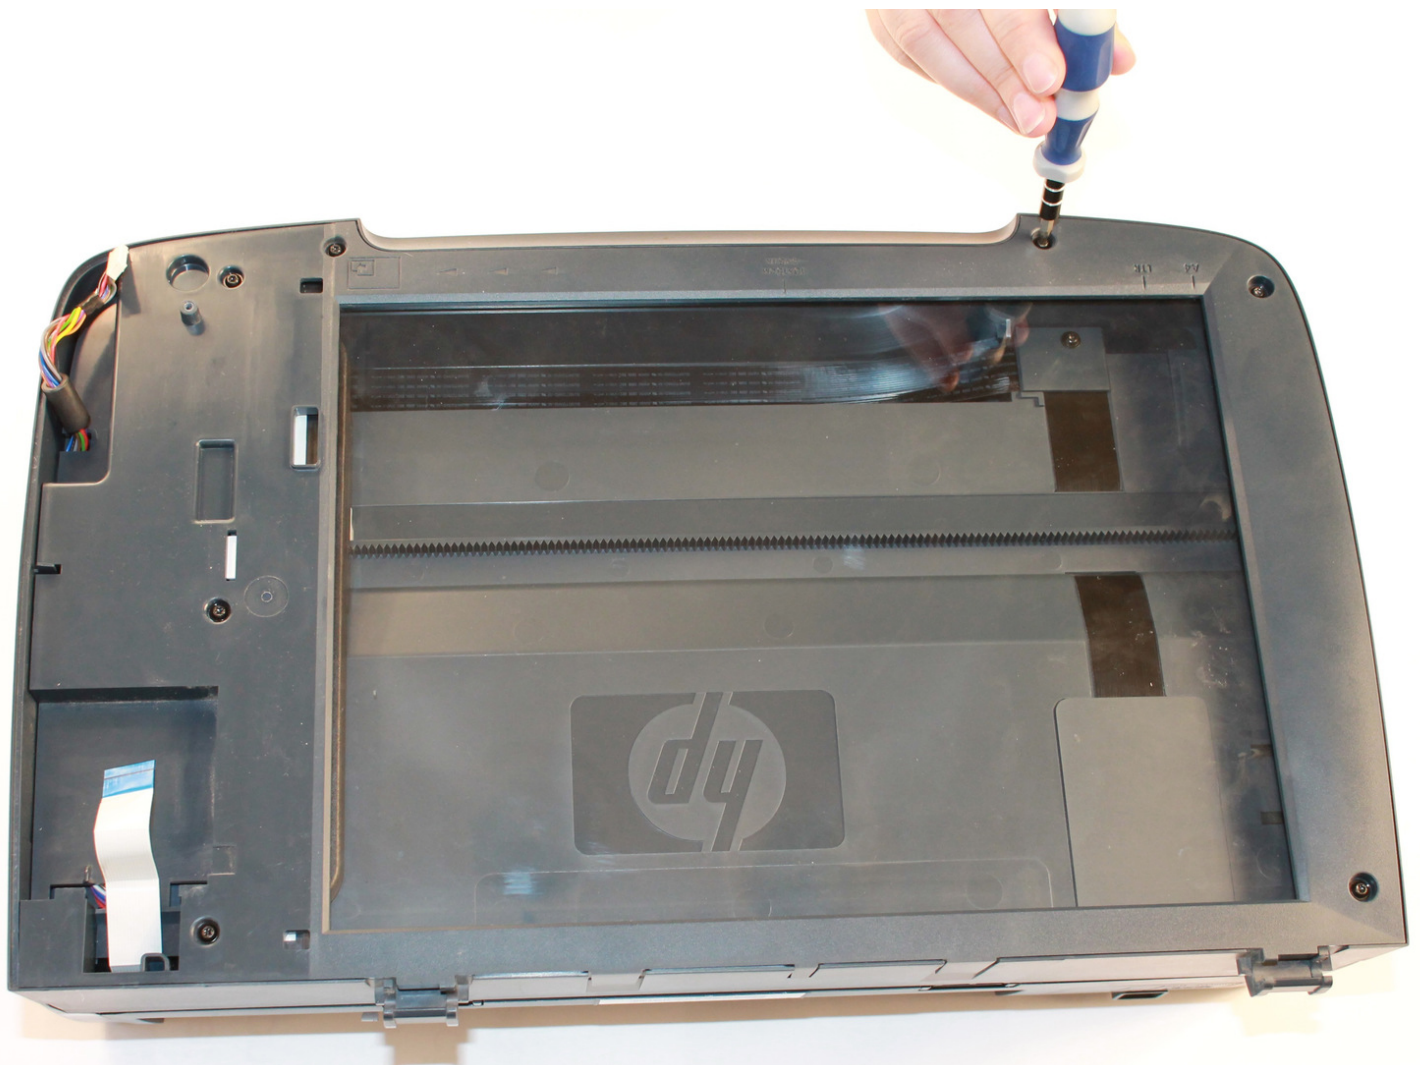

INTRODUCTION

A damaged scanner glass will at best produce poor quality images, and at worst damage other parts of the printer or cause injury. Replacing the scanner glass only requires a couple tools and a little patience.



TOOLS:

- [Spudger](#) (1)
 - [T9 Torx Screwdriver](#) (1)
-

Step 1 — Scanner Lid



- Grasp the scanner lid cover from the front of the device and lift lid all the way up until it stands on its own.

Step 2



- With two hands, grasp the lid on both sides near the hinges and lift straight up to release the lid from each hinge.

Step 3 — Scanner Glass



- Once you have removed the scanner lid, locate the finger notch on the inside top left half of the bezel (control) panel cover.

Step 4



- Place your index finger in the notch and lift up to unsnap the panel.
- Set panel cover aside.

Step 5




- Use a T9 torx screwdriver to remove the 0.9 cm screw.

Step 6



- From the front of the printer, remove the button panel by pulling it towards you while slightly lifting it up.

Step 7

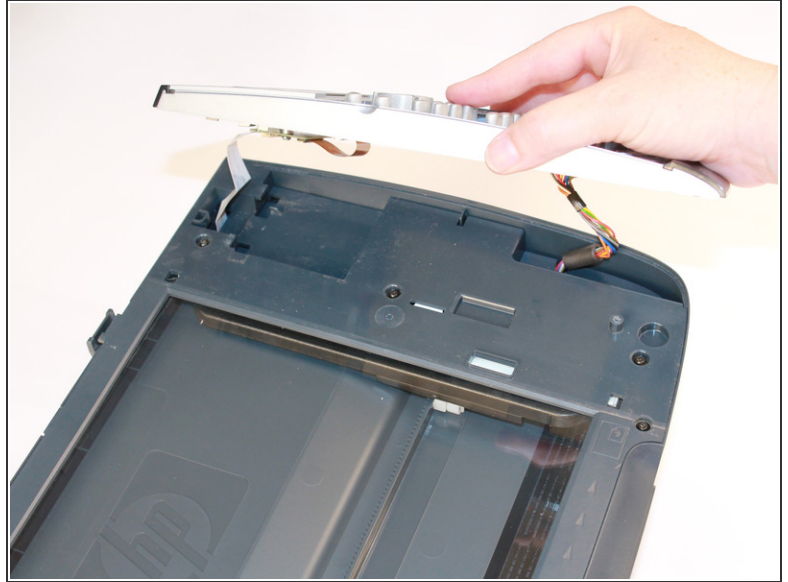


- Disconnect the white ribbon cable by grasping it between your thumb and forefinger.
- Gently pull to release the ribbon from the green circuit board.

Step 8



- Next, use a spudger to pry loose the flat ribbon computer cable by the plastic connection end and carefully separate it from the prongs on the button panel.
- Now the whole button should be completely disconnected from the printer.
- Set button panel aside.

Step 9

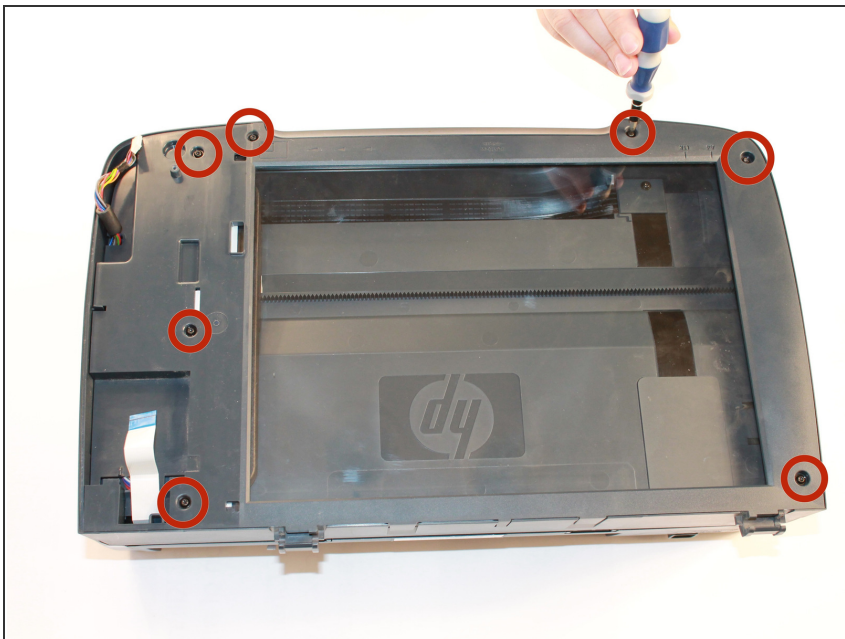



- Using the T9 torx screwdriver, unscrew the seven 0.9 cm black screws on the top plastic frame around the glass.

Step 10




- From the back of the printer, locate the two large plastic tabs as shown.
- With your index fingers underneath each tab, gently and simultaneously pull the tabs towards you and upwards to release the tabs from the plastic clasps behind them.
- Once these tabs are released, you should be able to remove the whole plastic frame that holds the glass.

Step 11

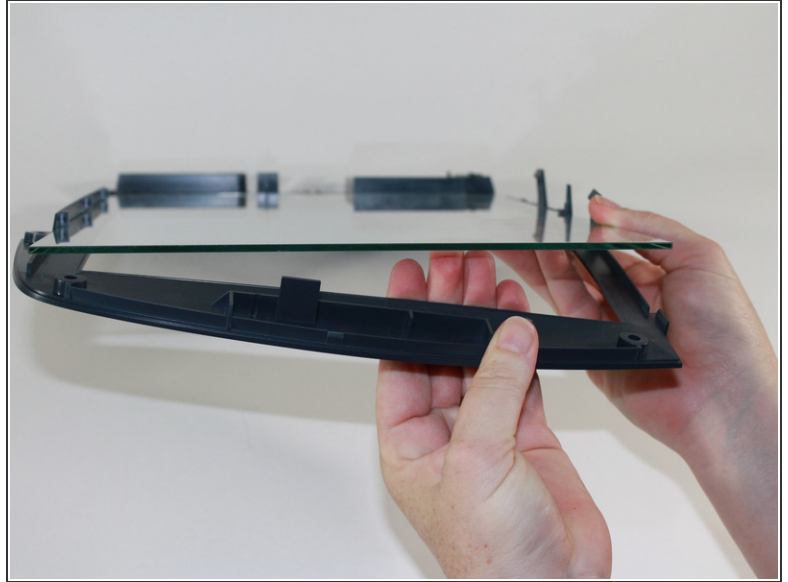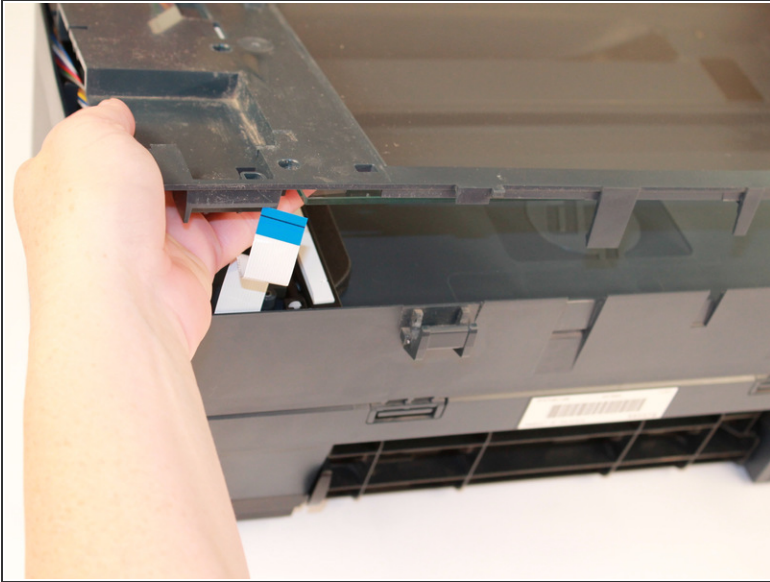

- Gently lift the glass/plastic bed from the edge on the side opposite of the button/control panel section.
- As shown in the second image, gently lift the glass pane up so that it is above the plastic tab that holds it into place.

Step 12

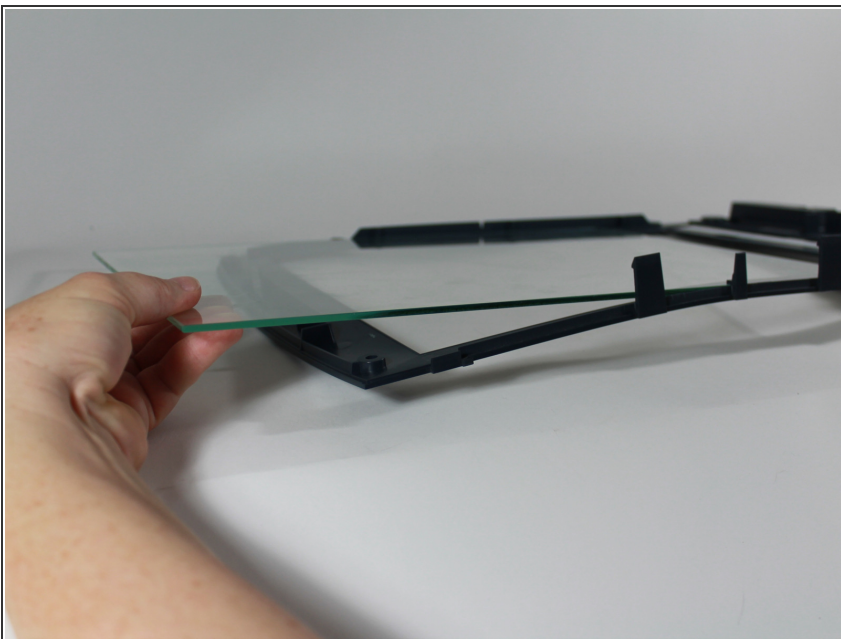

- Proceed to slide the glass pane out and over the plastic tab to remove it completely from the plastic bed.
- Replace the glass with your new glass pane. To fully reassemble the printer, follow these instructions in reverse order.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-16 03:43:21 PM.